

ERLENBACH - SILOS FOR EPS, EPP AND RECYCLED MATERIAL





Intermediate ageing silos for EPS and EPP

ERLENBACH silos for the intermediate storage and stabilisation of EPS- and EPP materials as well as for recycled materials are 'safe' construction-wise and also application-wise.

Execution

Sizes:	silos with a volume < 20 m ³ for a max. mat.-density of up to 70 kg/m ³ silos with a volume = 20 m ³ for a max. mat.-density of up to 50 kg/m ³ silos with a volume > 50 m ³ for a max. mat.-density of up to 35 kg/m ³
frame:	anti-corrosive-priming
texture:	with woven steel-thread, not coated, respiratory, anti-static
lid:	anti-static, interior-surface: dust-rejecting
clear widths:	800 mm to floor (standard)
accessories:	piping, pneumatic distributors, level-sensors, automatic silo controllers, etc. at special request

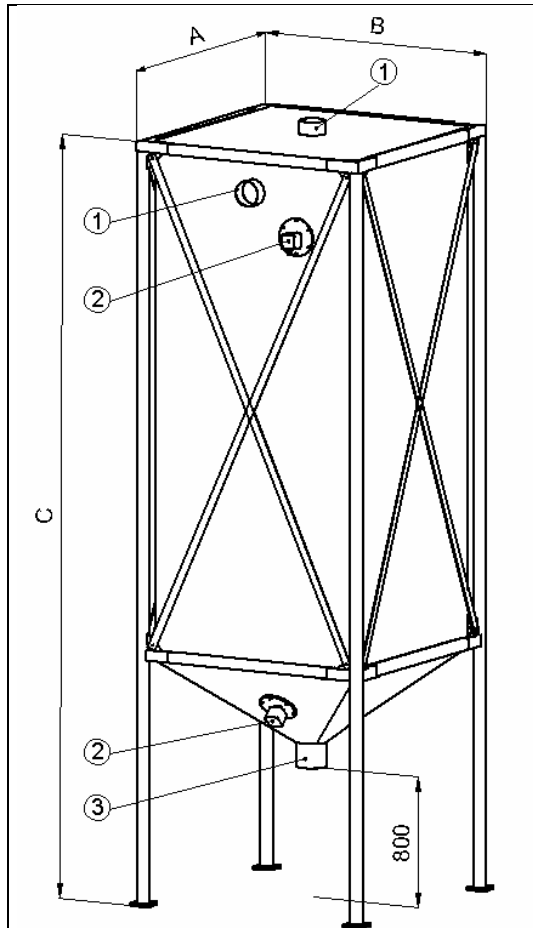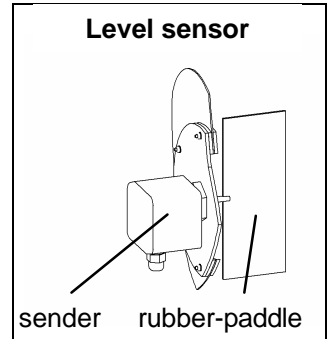

- 1 Filling connect. $\varnothing 180$ up to $\varnothing 230 \times 150$ mm long (at side or top-centre)
- 2 PVC-reinforcement $\varnothing 280$ mm (with level-sensor)
- 3 Drain connect. $\varnothing 180$ up to $\varnothing 380 \times 150$ mm long

volume m ³	length A mm	width B mm	height C mm
1,5	1040	1040	3170
1,9	1040	1040	3670
2,3	1040	1040	4170
2,7	1040	1040	4670
3,1	1040	1040	5170
4,3	1540	1540	3670
5,3	1540	1540	4170
6,3	1540	1540	4670
7,3	1540	1540	5170
8,2	1540	1540	5670
7,5	2040	2040	3670
9,8	2040	2040	4170
11,6	2040	2040	4670
13,4	2040	2040	5170
15,2	2040	2040	5670
16,2	2040	2040	6170
16,5	2540	2540	4670
19,5	2540	2540	5170
22,3	2540	2540	5670
25,2	2540	2540	6170
28,4	3040	3040	5170
32,6	3040	3040	5670
36,8	3050	3050	6170
39,5	3050	3050	6670
43,7	3060	3060	7170
51	3560	3560	6670
64	4170	4170	6170
70	4170	4170	6670
80	4180	4180	7170
90	4220	4220	7970
100	4720	4720	7470
110	4720	4720	7970
120	4720	4720	8470
130	4740	4740	8970

- Special sizes upon demand – Subject to technical changes -